



90° ELBOW

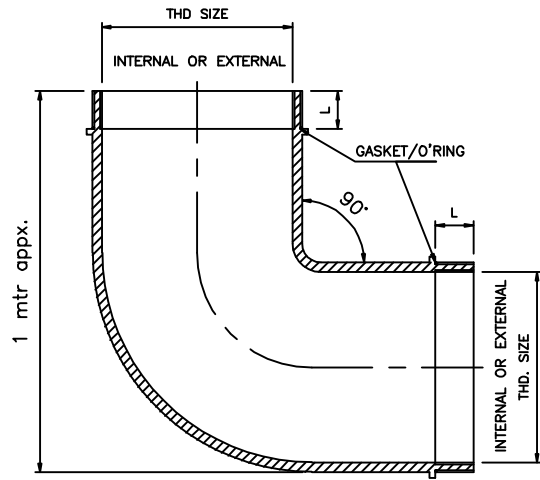

45° ELBOW

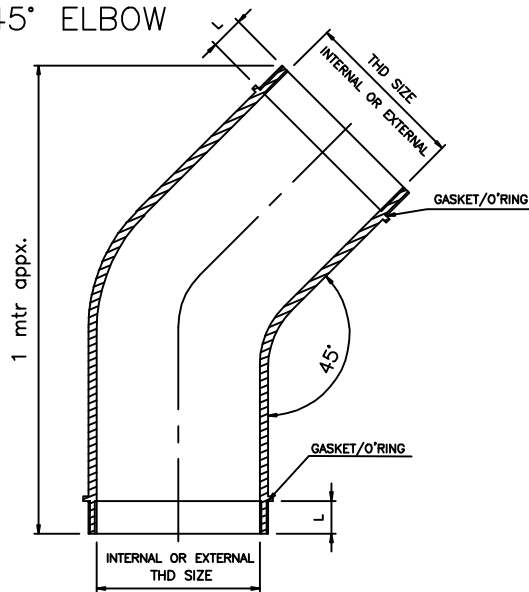

GASKET/O'RING NOT PROVIDED IN NPT THREADS

SPECIFICATION

TYPE OF PROTECTION :-

Ex'd' IIA, IIB & IIC AS PER IS/IEC 60079-1:2007

DEGREE OF INGRESS PROTECTION :-

IP-66 AS PER IS/IEC 60529:2001

AREA CLASSIFICATION :-

ZONE 1 & 2

GAS GROUPS :-

GROUP IIA, IIB & IIC.

CONSTRUCTION :-

BRASS NICKEL PLATED AS STANDARD

OPTIONAL S.S. OR M.S.

GASKET/O'RING :-

ENDLESS MOLDED NEOPRENE

ORDERING CODE :-

CAT. NO. FOLLOWED BY SIZE e.g. KEL-*X* M20x1.5 OR KEL-*X* 1/2"NPT

SIZE & CAT NO. :-

CAT.NO.	THD. SIZE (M) EXT/INT(MAX)	THD. SIZE (M) EXT/INT(MAX)	THD. SIZE (ET) EXT/INT(MAX)	THD. SIZE (ET) EXT/INT(MAX)	THD. SIZE (NPT) EXT/INT(MAX)	THD. SIZE (NPT) EXT/INT(MAX)	HEX	L
KEL-*X*	M12x1.5	M12x1.5	-	-	1/4"	1/4"	20	15
KEL-*X*	M16x1.5	M16x1.5	-	-	3/8"	3/8"	20	15
KEL-*X*	M20x1.5	M20x1.5	3/4"	3/4"	1/2"	1/2"	25	15
KEL-*X*	M25x1.5	M25x1.5	1"	1"	3/4"	3/4"	32	15
KEL-*X*	M32x1.5	M32x1.5	1-1/4"	1-1/4"	1"	1"	38	17.5
KEL-*X*	M40x1.5	M40x1.5	1-1/2"	1-1/2"	1-1/4"	1-1/4"	42	17.5
KEL-*X*	M50x1.5	M50x1.5	2"	2"	1-1/2"	1-1/2"	56	20
KEL-*X*	M63x1.5	M63x1.5	2-1/2"	2-1/2"	2"	2"	75	20
KEL-*X*	M75x1.5	M75x1.5	3"	3"	2-1/2"	2-1/2"	82	20
KEL-*X*	M100x1.5	M100x1.5	-	-	3"	3"	110	20

CIMFR CERT NO.:- CIMFR/TC/P/H681
SUPPLE. T.C. NO.:- CIMFR/TC/S/H139

TYPE/CAT NO.:- KEL-*X* SERIES

CLIENT		DRAWN	KBP	1.3.12
CONSULTANT		APP'D	HPB	1.3.12
P.O.No.		CH'D	NPB	1.3.12

DESCRIPTION:-
FLAMEPROOF & WEATHERPROOF
90° & 45° ELBOW

THE INFORMATION CONTAINED IN THIS DRAWING IS THE PROPERTY OF KAYSONS TECHNO EQUIPMENTS PVT. LTD. AND IS NOT TO BE COPIED OR MISUSED IN ANY WAY.

ISSUE	DATE	BY

MODIFICATION



KAYSONS
TECHNO EQUIPMENTS PVT LTD

1802/7, G.I.D.C. ESTATE,
V.U.NAGAR 388121. (GUJARAT)

SHT.NO. 1 OF 1
REV. 0

DRG.NO.:-

L07